


Dimensiones de las electroválvulas servomando de 2 vías NA

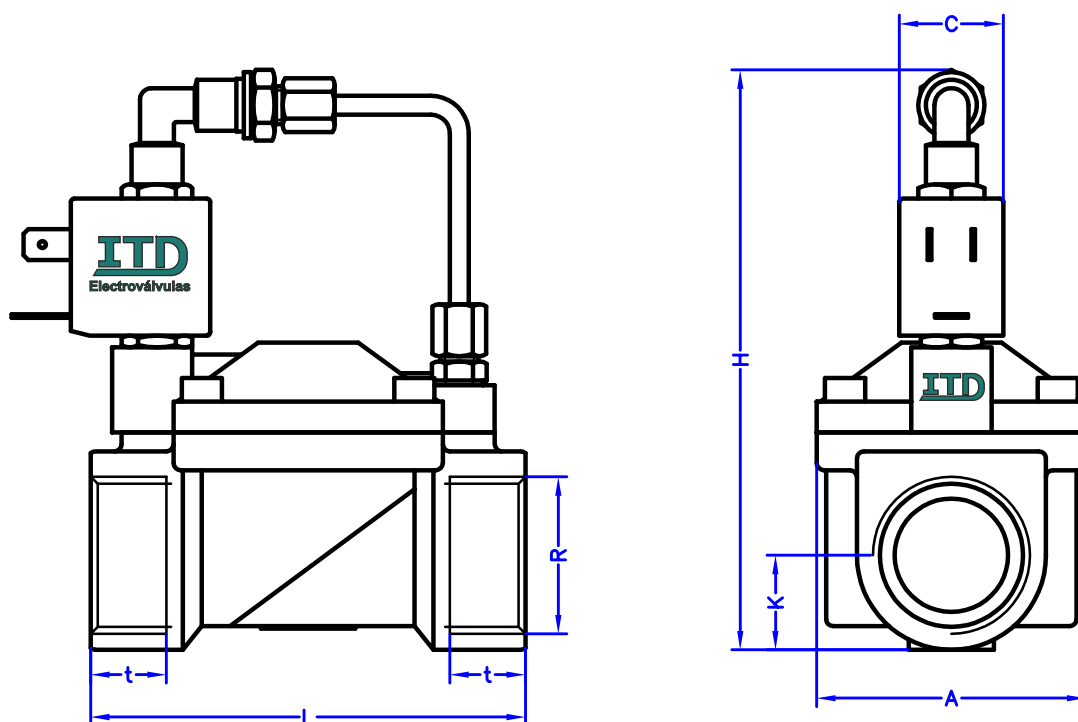

DIMENSIONES									
Referencia	R	L mm	H mm	K mm	t mm	A mm	B mm	C mm	Peso Kg
032A-10	3/8"	59	117	13	8	45	42	23	0,49
042A-12	1/2"	59	117	13	8	45	42	23	0,47
2304A-18	1/2"	80	134	19	12	55	63	40	1,02
2205A-20	3/4"	80	117	19	12	55	42	23	0,84
2305A-20	3/4"	92	145	21,5	16	58	63	40	1,41
2206A-25	1"	92	123	21,5	16	58	42	23	1,01
2306A-25	1"	92	145	21,5	16	58	63	40	1,31
272A-32	1 1/4"	109	165	24	16	75	63	40	1,76
2307A-32	1 1/4"	104	153	25	16	58	63	40	1,60
282A-38	1 1/2"	131	162	28	20	86	63	40	2,76
292A-50	2"	146	210	40	20	110	63	40	5,36

ITD
Electroválvulas

ITD - Electroválvulas y Automatización, S.L.
Pol. Ind. Jain, 132C
San Felices de Buelna (Cantabria) España
www.itd-electrovalvulas.com